



## Unperforated tray 3 m 50 mm

E-no — MP-no 390S

Unperforated cable tray. Painted trays are supplied with internally paint-free ends. Other lengths and colours quoted on request. The Sendzimir process is used to prevent corrosion and may result in slight variations in colour/appearance. Bracket distance is determined by the length of the rail. 2 m rail = C-C 2 m and 3 m rail C-C = 3 m. 6 m rail needs a suspension in the middle. These values apply at normal load.

## Product details

E-NO	MP-NO	EAN	DIMENSIONS (DXWXH)
	<b>390S</b>	<b>7394333100081</b>	<b>3000x50x45</b>
WEIGHT KG	SURFACE	ENVIRONMENT CLASS	PACKAGE PIECES
<b>3.65</b>	<b>Galvanized sheet 20 <math>\mu</math>m</b>	<b>C2</b>	<b>6</b>

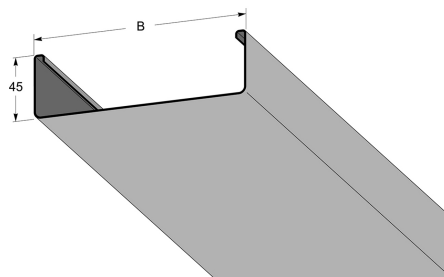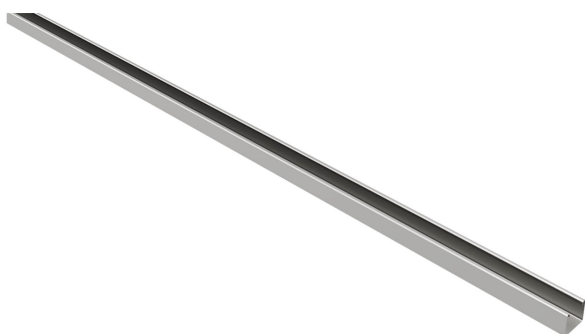

Nedböjning i mm vid 2 m och 3 m konsolavstånd.

