



## Perforated tray 2 m 600 mm

E-no — MP-no 3831S

Perforated tray with about 13% perforation. Painted trays are supplied with paint-free ends (internally). Other lengths and colours quoted on request. The Sendzimir process is used to prevent corrosion and may result in slight variations in colour/appearance. Bracket distance is determined by the length of the rail. 2 m rail = C-C 2 m and 3 m rail C-C = 3 m. 6 m rail needs a suspension in the middle. These values apply at normal load.

## Product details

|                    |                |                               |
|--------------------|----------------|-------------------------------|
| E-no               | MP-no          | EAN                           |
|                    | <b>3831S</b>   | <b>7394333106854</b>          |
| Dimensions (dxwxh) | Weight kg      | Surface                       |
| <b>2000x600x45</b> | <b>14.62</b>   | <b>Galvanized sheet 20 µm</b> |
| Environment class  | Package pieces | Climate impact (kgCo2e)       |
| <b>C2</b>          | <b>2</b>       | <b>39.18</b>                  |

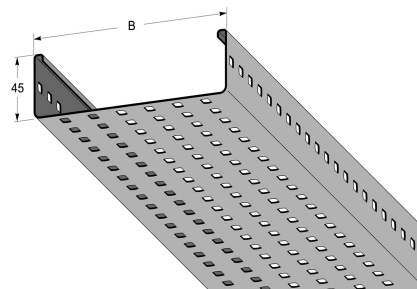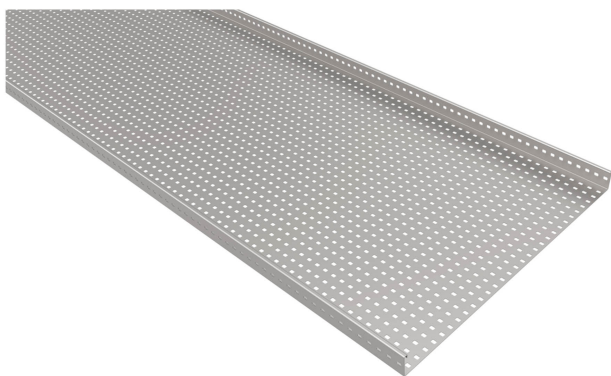

Nedböjning i mm vid 2 m och 3 m konsolavstånd.

