



Perforated tray 3 m 75 mm

E-no — MP-no 3131S

Perforated tray with about 13% perforation. Painted trays are supplied with paint-free ends (internally). Other lengths and colours quoted on request. The Sendzimir process is used to prevent corrosion and may result in slight variations in colour/appearance. Bracket distance is determined by the length of the rail. 2 m rail = C-C 2 m and 3 m rail C-C = 3 m. 6 m rail needs a suspension in the middle. These values apply at normal load.

Product details

E-NO	MP-NO	EAN	DIMENSIONS (DXWXH)
	3131S	7394333110660	3000x75x45
WEIGHT KG	SURFACE	ENVIRONMENT CLASS	PACKAGE PIECES
3.95	Galvanized sheet 20 μm	C2	6

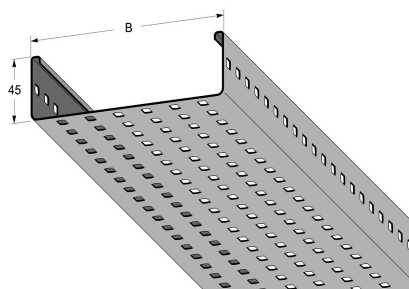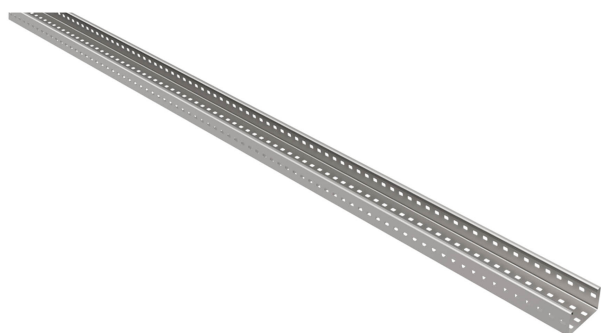

Nedböjning i mm vid 2 m och 3 m konsolavstånd.

