



## Perforated tray 2 m 500 mm

E-no — MP-no 3731S

Perforated tray with about 13% perforation. Painted trays are supplied with paint-free ends (internally). Other lengths and colours quoted on request. The Sendzimir process is used to prevent corrosion and may result in slight variations in colour/appearance. Bracket distance is determined by the length of the rail. 2 m rail = C-C 2 m and 3 m rail C-C = 3 m. 6 m rail needs a suspension in the middle. These values apply at normal load.

## Product details

E-no	MP-no	EAN
	<b>3731S</b>	<b>7394333119854</b>
Dimensions (dxwxh)	Weight kg	Surface
<b>2000x500x45</b>	<b>10.53</b>	<b>Galvanized sheet 20 µm</b>
Environment class	Package pieces	Climate impact (kgCo2e)
<b>C2</b>	<b>2</b>	<b>28.22</b>

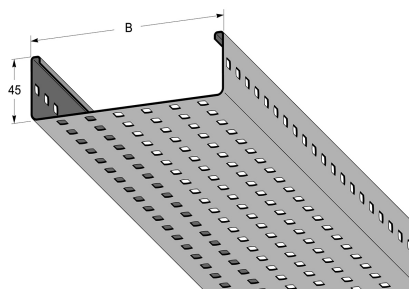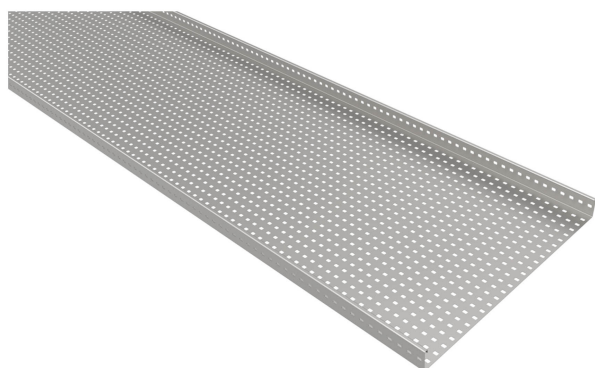

Nedböjning i mm vid 2 m och 3 m konsolavstånd.

