


Roof support for cable ladder, wire mesh trays and pipes

Roof support for cable installation on flat roofs. M8 screw for universal attachment. Wire ladder 55–75 mm is screwed with universal bracket MP-731. For wider wire mesh trays, two parallel roof supports are used. Cable ladder is mounted by using angle brackets or against anchor rail which is attached to roof support at both ends. Fits two pipes $\varnothing 16$ –32 mm or one $\varnothing 16$ –100 mm. Internal weight of approximately 1 kilogram.

Modell	EAN
PVX2	7394333056241

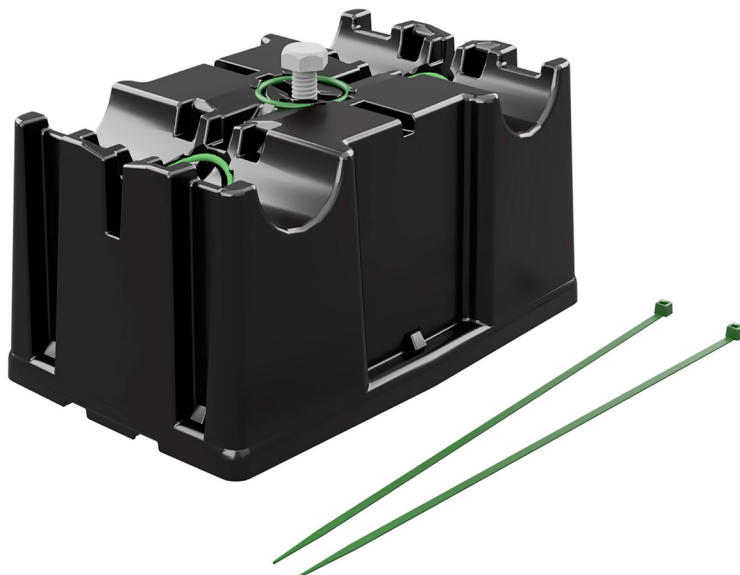

Technical Specification

- L 168 x W 107 x H 75 mm
- Material: HDPE
- Maximum load: 200 kg
- Temperature range: -40°C to +60°C
- Ballast in frost-free concrete
- 100% UV-resistant

